

## Portrait™ SmartFit™

### Getting Started

Remove the shade from the package. Save the packaging until the shade is installed and working to your satisfaction.

#### Tools Needed:

- Power drill and drill bit
- Measuring tape
- Screwdriver
- Level
- Pencil



You will need to use the following fasteners for your particular mounting surface.


Surface	Fastener
Wood	M3.5x25mm Screws (Provided) 
Drywall/Plaster	Wall Anchors, Expansion Bolts (Not Provided) 
Metal	Sheet Metal Screws (Not Provided) 

### Bracket Installation

#### Inside Mount

For flush mount, the minimum distance from the top/bottom wall to the center of the screw hole needs to be 1/2" and 3/8" from the side wall to the center of the screw hole. Align the cover with the notch of the base and push the cover in toward the wall.

(Top) (Bottom)


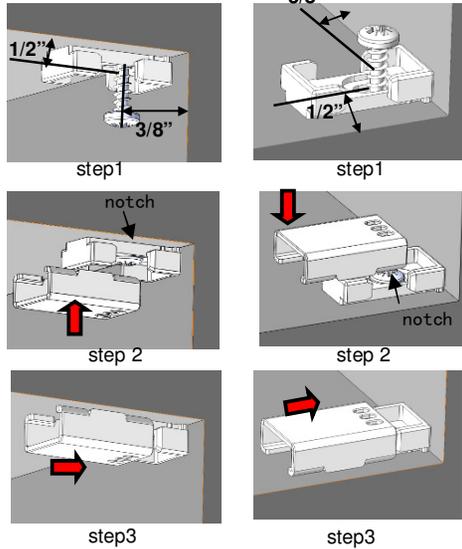


#### Outside Mount

First, keep L bracket flush with the side wall and a minimum distance of 1 1/8" from the center of the screw hole to the top/bottom window opening. Then, use 2 M3.5x25mm screws to fasten the L bracket.


Once the L bracket is installed, attach the cover onto it to hide the screws. Finally, use 1 M3 x 3mm screw to attach mounting bracket. Align the cover with the notch of the base and push the cover in toward the wall.

(Top)

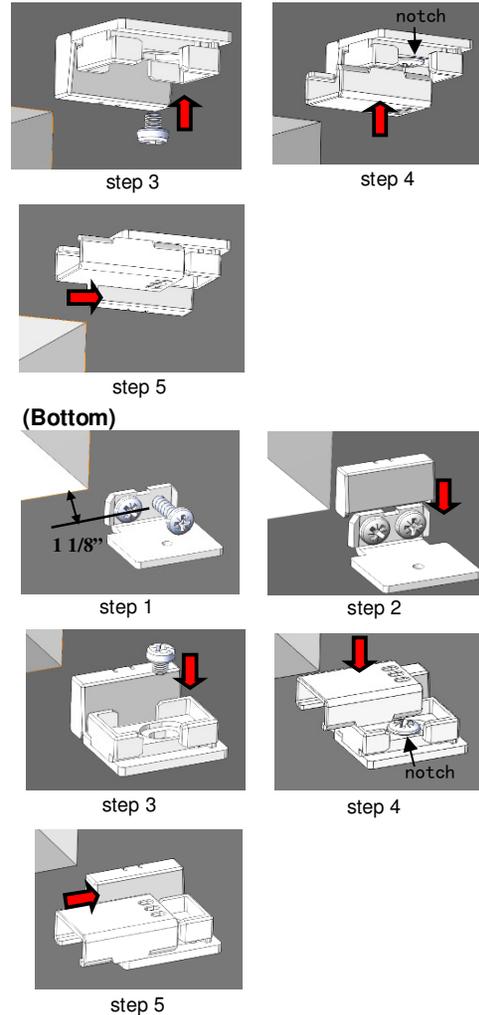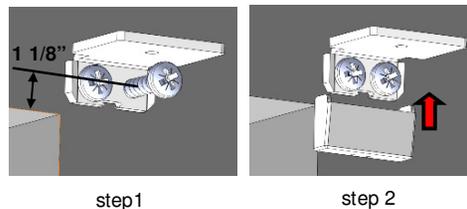


### Handle Installation

- Slide the handle onto the plastic piece pre-attached to the rails.

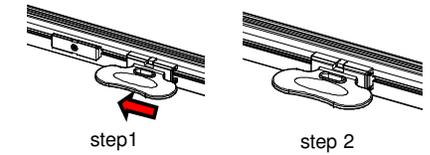


### Notes

- For child safety, please check and ensure that there are no loose cords after the shade is completely installed.
- Please also make sure that cords are nice and tight and not tangled.

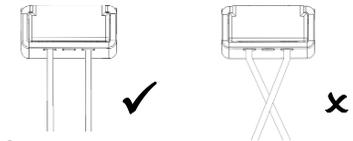

### Cleaning

Routine cleaning will help maintain the beauty of your shade. The shade can be cleaned by using a soft brush, vacuumed with a low suction hand-held vacuum, cleaned ultrasonically (specify that a mild solution must be used and that the head rail should never be immersed in liquid), or dampen a clean cloth with a warm water and mild detergent solution to dab the spot until it's gone (do not rub!).

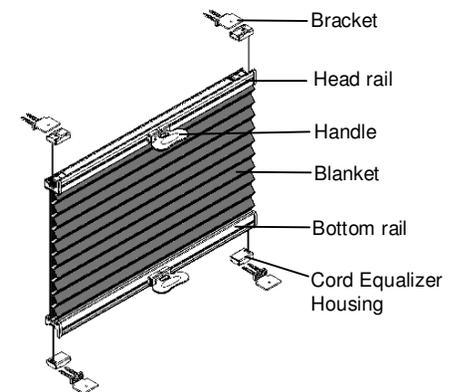

Note: See below. Align L bracket 1/4" away from the edge to outside screw hole of the L bracket.

